


Sunview Led

Innovative LED Light Manufacturer

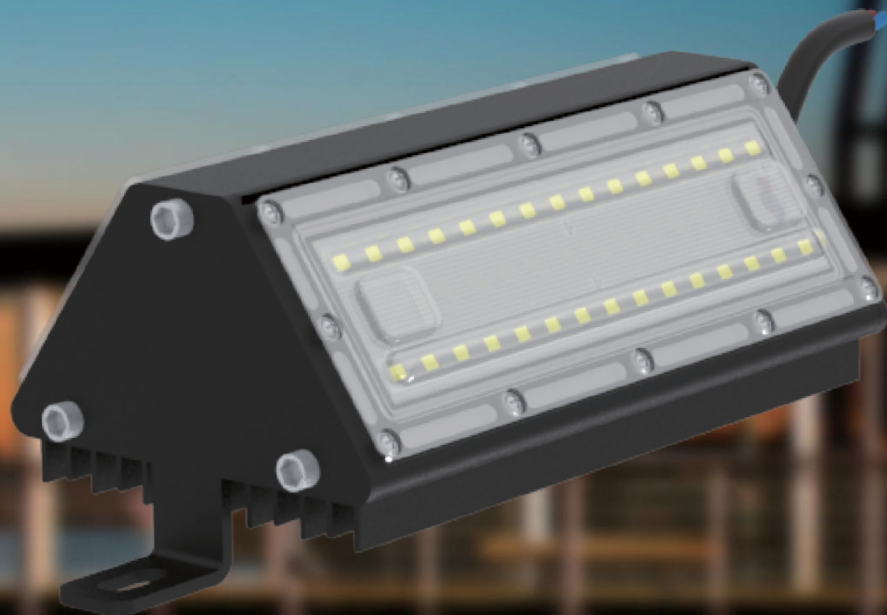

S-300-BL

Next Gen Bulkhead Led

Sunview Led, LLC


T: +1 877 778-6843
E: info@sunviewled.com
www.sunviewled.com

ADD: 30 N Gould St,
Suite 1404
Sheridan, WY 82801

CE RoHS

Provides a large area of bright and
widely scattered light
IP66 / IK10


①



②



③

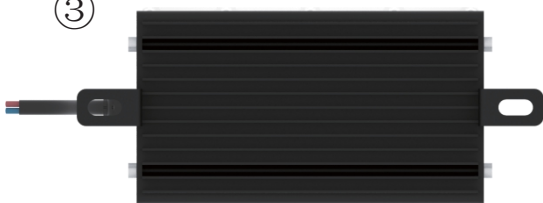

IP66

IK10





WATTAGE	30/50W
LAMP LUMINOUS FLUX	150LM/W \pm 5%
CRI	Ra>70
CCT	2700-6500K
RATED VOLTAGE	AC 100-240V 277V~,50/60Hz
POWER FACTOR	>0.95
IP GRADE	IP66
OPERATING TEMP	-40 $^{\circ}$ C~60 $^{\circ}$ C

S-300-BL-30W4,500LM \pm 5%1.15kg \pm 5%

250x107.4X84mm

S-300-BL-50W7,500LM \pm 5%1.2kg \pm 5%

250x107.4X84mm



**ULTRA WIDE-ANGLE
ILLUMINATION 150 $^{\circ}$**

| Installation



Ceiling installation



Suspension installation



Wall mounting

| Application



Tunnel



Mining





Industrial Lighting



Ambient Lighting

| LIGHT Distribution Curve

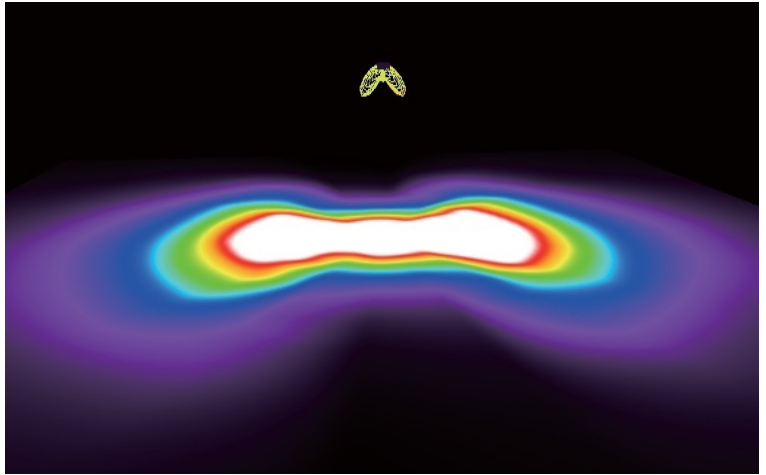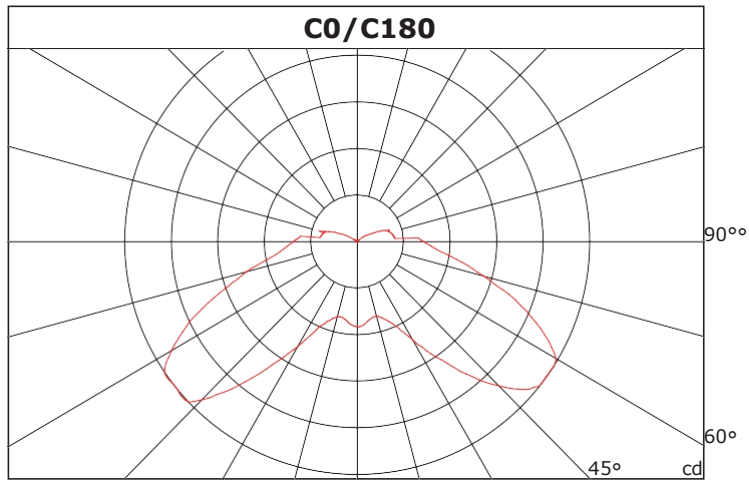

G5-Type


Underground Mining



Conveyor belt




| Test

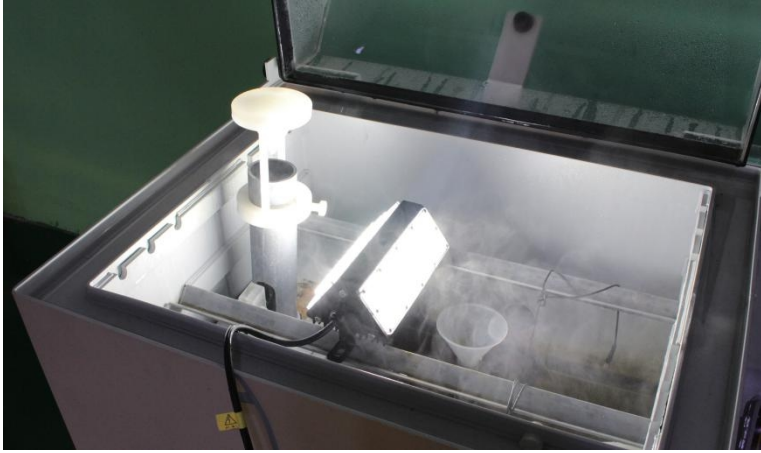

Salt Spray Test

The heat sink processed by oxidization and powder spraying so that it has good corrosion resistance

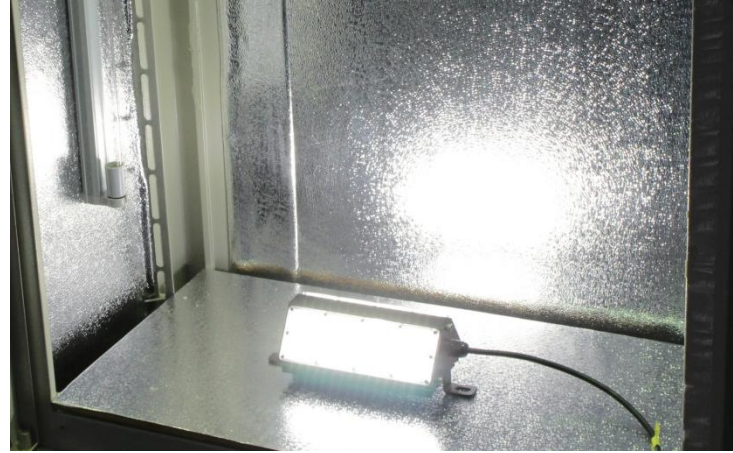

UV Aging Test

The test time is about 720 hours. After test the lamp working regularly, no discoloration appearance, no yellowing of the PC lens .



High-Low Temperature Test

The test equipment opening 4hours, keeping temperature <math>< -40^{\circ}\text{C}</math> the lamp working fine. The test equipment opening 4hours keeping temperature $> 60^{\circ}\text{C}$, the lamp keep working fine




Withstand Voltage Test

Testing whether the withstand voltage is within the specified value, to avoid sudden voltage surges such as short circuit, operation error, fault, etc, causing breakdown or accidents




Vibration Test

Vibration test is a simulation of various vibration condition including transportation, installation and using, to ensure system robustness.

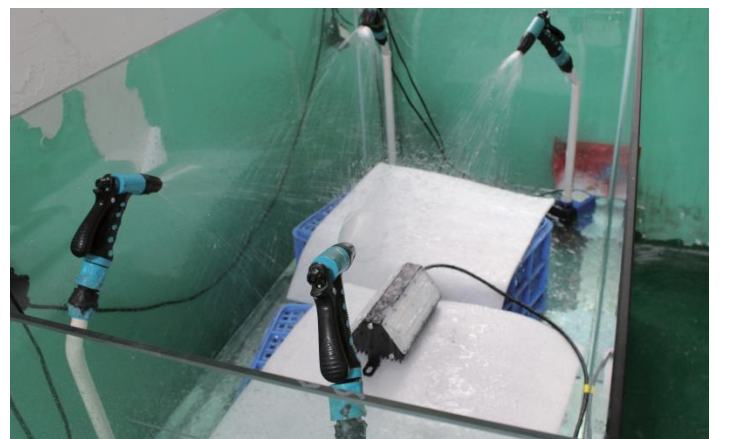

Waterproof Test

Every lamp will be tested the water-proof at least 2 spraying so that it has good corrosion resistance. make it very efficient to shorten lead time.

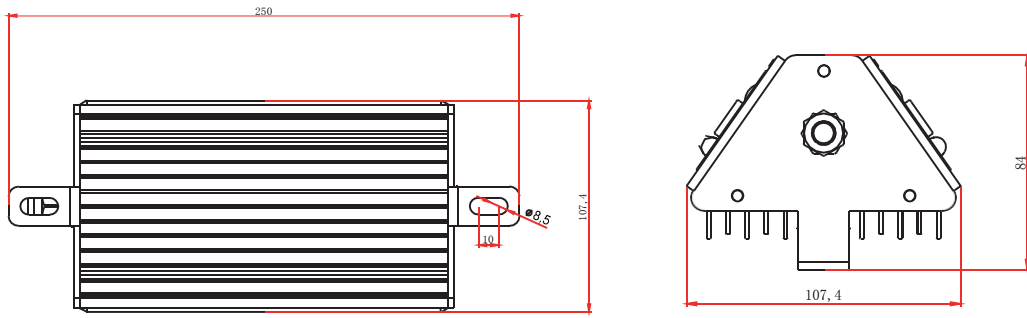

Model	Size of Box	Gross Weight	Size of Carton	Gross Weight	/Carton
S-300-BL-30W	280*160*140mm	1.35 KG	820*305*320mm	14.50 kg	10
S-300-BL-50W	280*160*140mm	1.40 KG	820*305*320mm	15.00 kg	10

Packaging

