

Sunview Led



Next Gen Downlight Led S-200

Sunview Led, LLC

Address: 30 N Gould St, Suite 1404 Sheridan, WY 82801

Phone: 877 778-6843

E-mail: info@sunviewled.com


Web: www.sunviewled.com

Parameter

Wattage	CRI	CCT
15W	Ra > 80/90	2700-6500K
Materials	Power Factor	Lamp Luminous Flux
Aluminium	> 0.95	1500-1600LM
Rated Voltage		Operating Temperature
AC 180-240V 50/60Hz		-30°C ~ 40°C

Advantages

- ▶ Cut sheets: 55-95mm
- ▶ Easy installation
- ▶ Save energy
- ▶ Environmentally friendly

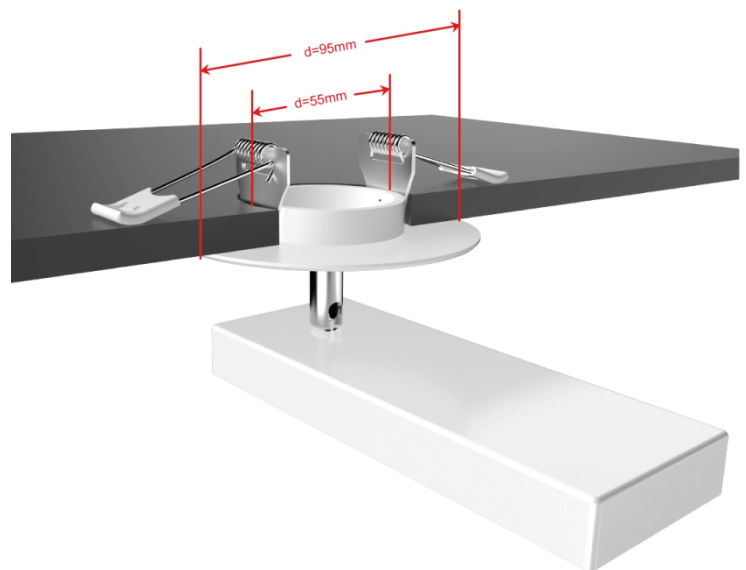

Application

- ▶ Designed for such clothing store, museum, professional window, starred hotel, showroom, kitchen, apartment, dining room and so on.



Clothing Store



Dining Room



Garage

Type of Module




▶ **Type A** | Beam Angle: 20°/30°
LED Quantity: 9LEDs




▶ **Type B** | Beam Angle: 120°
LED Quantity: 30LEDs

Adjustable Module


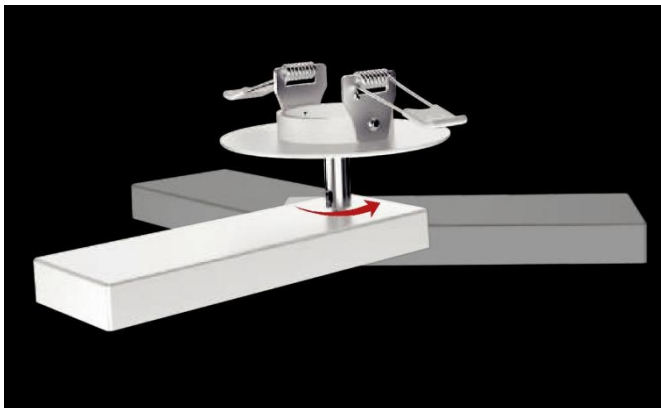


▶ **Horizontally 360°**

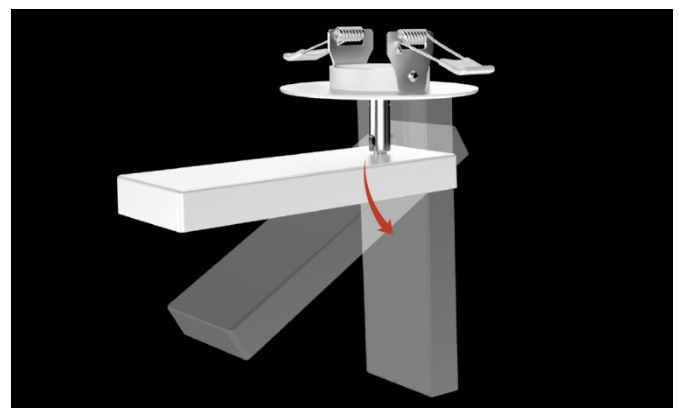


▶ **Vertically 90°**

Dimension

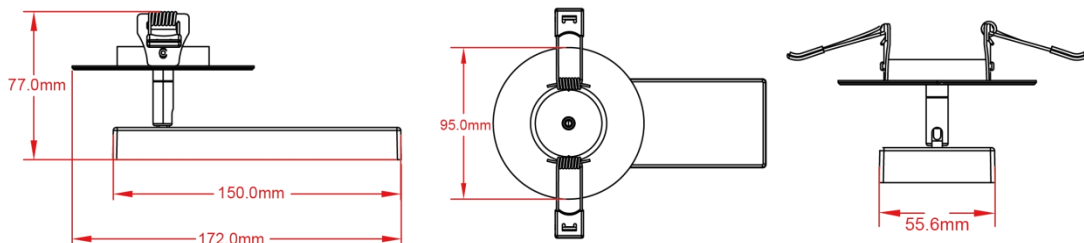

10Pcs



0.45Kg

218.5X106.5X109

4.85Kg

562X250X250mm